

# Cisco TelePresence MCU 4501


**Figure 1.** Cisco TelePresence MCU 4501



## Product Overview

The Cisco TelePresence<sup>®</sup> MCU 4501 is the industry's leading entry-sized, full high-definition (HD) conferencing bridge (Figures 1 and 2). It offers organizations a low-risk, cost-effective solution for HD multipoint video conferencing. For those organizations with an existing standard-definition (SD) video environment, it provides a seamless transition path to HD with an option to upgrade the capacity when required. Compatible with all major vendors' SD and HD endpoints, it delivers the best experience for each participant, every time.

**Figure 2.** Cisco TelePresence MCU 4501 Is Standards-Based and Compatible with All Major Vendors' Endpoints.

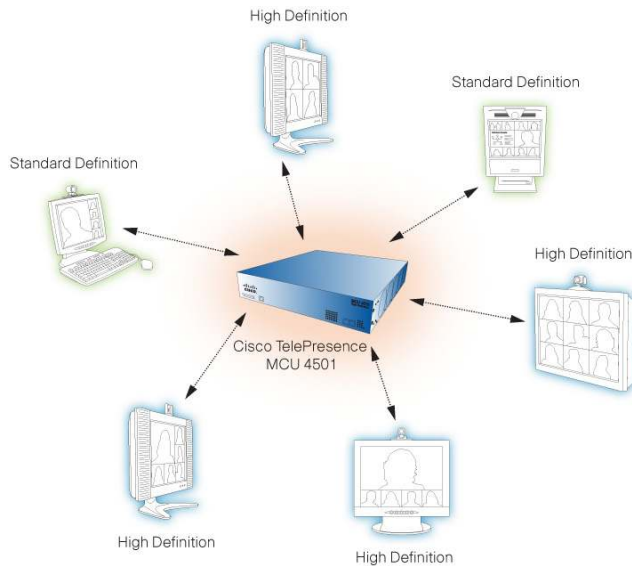

## Features and Benefits

Table 1 summarizes the key features of the Cisco TelePresence MCU 4501, and Table 2 gives information about the models in the Cisco TelePresence MCU 4501.

**Table 1.** Cisco TelePresence MCU 4501 Feature Summary

Feature	Benefit
<b>Design features</b>	<ul style="list-style-type: none"> <li>Standards-based and compatible with all major vendors' endpoints</li> <li>Selectable between 6 HD or 12 SD video ports</li> <li>Upgradable to 12 HD or 24 SD video ports</li> <li>Easy-to-use, versatile management interface</li> <li>More than 50 custom layouts</li> <li>Comprehensive wideband audio support</li> <li>Support for both Session Initiation Protocol (SIP) and H.323 endpoints</li> <li>Cisco TelePresence PacketSafe technology, which minimizes effects of network packet loss</li> <li>Compact size: Two rack units (2RU) tall and 19-in. rack-mountable</li> </ul>
<b>Application features</b>	<ul style="list-style-type: none"> <li>Supports Cisco TelePresence ConferenceMe technology for multipoint desktop video</li> <li>Provides upscale SD resolution using Cisco TelePresence ClearVision technology</li> <li>Integrated with Cisco TelePresence Management Suite</li> <li>Offers full interoperability with ISDN networks using standalone Cisco TelePresence ISDN gateways</li> <li>Compatible with Microsoft Office Communications Server</li> <li>Fully integrated, with built-in gatekeeper and streaming server</li> <li>Supports Cisco® Multiway technology</li> </ul>
<b>Performance features</b>	<ul style="list-style-type: none"> <li>Continuous presence on every port</li> <li>Cisco TelePresence Universal Port technology, which helps ensure each participant receives the best possible experience</li> <li>Predictable port capacity</li> <li>Bandwidth per site up to 4 Mbps</li> <li>Video resolutions up to 1080p 30 fps</li> <li>SD support at up to 448p 30 fps</li> </ul>

**Table 2.** Cisco TelePresence MCU 4501 Models

Model	Continuous Presence Video Participants (Symmetric)	With 1080p30 Capacity Upgrade Option (Asymmetric)	Additional Voice Participants	Video Streaming Unicast /Multicast
<b>MCU 4501</b>	6 x 720p ports 3 x 1080p or 720p60 ports 12 x 448p ports	–	6 6 12	6/unlimited
<b>MCU 4501 + MCU 4501 PL6</b>	12 x 720p30 ports 6 x 1080p30 or 720p60 ports 24 x 448p ports	12 x 1080p30	12 12 24	12/unlimited
<b>VFO-4500</b>			Video firewall option enables second Ethernet connection to additional networks (for example, the Internet)	

\*Maximum number of unicast streams depends on network topology.

## Product Specifications

Table 3 lists the product specifications; Table 4 gives video and audio specifications; Table 5 gives network, security, and management specifications; and Table 6 lists the product physical specifications for the Cisco TelePresence MCU 4501.

**Table 3.** Product Specifications

<b>Product compatibility</b>	<ul style="list-style-type: none"> <li>Standards-based and compatible with all major vendors' endpoints</li> </ul>
<b>Universal transcoding and transrating</b>	<ul style="list-style-type: none"> <li>HD and SD can be combined within the same conference.</li> <li>All calls are automatically audio and video transcoded and transrated.</li> <li>Any bandwidth, any resolution, any video, or audio codec can be used on any video call within the same conference.</li> <li>All participants have their own personal encodes.</li> </ul>

<b>Streaming video</b>	<ul style="list-style-type: none"> <li>• Built-in streaming server</li> <li>• Ability to view using Windows Media Player, RealPlayer, or QuickTime</li> <li>• Streaming of slides (H.239 and Virtual Network Computing [VNC])</li> <li>• Text chat</li> <li>• Unicast and multicast</li> <li>• User Datagram Protocol (UDP), TCP, or HTTP</li> <li>• Independent choice of bandwidth and codec</li> </ul>
<b>Localization and customization</b>	<ul style="list-style-type: none"> <li>• Custom interactive voice response (IVR)/auto attendant audio prompts and graphics</li> <li>• Uploadable multilanguage support</li> <li>• Unicode conference and site names</li> </ul>
<b>Built-in gatekeeper</b>	<ul style="list-style-type: none"> <li>• Resolution of E.164 numbers</li> <li>• Registration of conferences, endpoints, and gateways</li> <li>• Ability to register up to 25 devices</li> </ul>
<b>Built-in web server</b>	<ul style="list-style-type: none"> <li>• Complete configuration, control, and monitoring of the system and conferences</li> </ul>
<b>Multipoint-control-unit (MCU) features</b>	<ul style="list-style-type: none"> <li>• Dial in or dial out through web server</li> <li>• Standalone or with gatekeeper</li> <li>• Configurable audio and video auto attendant</li> <li>• Advanced continuous presence as standard on all ports</li> <li>• Automatic selection of best layout</li> <li>• Individual layout selection using remote control or webpages</li> <li>• More than 50 custom layouts</li> <li>• Active speaker selection using remote control or voice activated</li> <li>• Floor assignment through webpage or management application</li> <li>• Far-end camera control tunneling using remote control or web text identification of sites</li> <li>• On-screen text messaging to individual or all sites</li> <li>• Built-in conference scheduling and reservation</li> <li>• On-demand and conferences</li> <li>• Dual video using H.239</li> <li>• Automatic lecture mode</li> <li>• Preview of conference and individual camera on webpages</li> <li>• Web conferencing option—those without endpoints can still interact</li> <li>• Uploadable bitmaps for voice participants</li> <li>• Video association for IP and traditional private branch exchanges (PBXs)</li> <li>• Automatic connection to audio conferences</li> <li>• Cisco TelePresence Multiway technology, which enables Cisco video endpoints to initiate ad hoc multiparty calls</li> </ul>
<b>Content features</b>	<ul style="list-style-type: none"> <li>• Presentation mode: You can add slides from your PC using VNC.</li> <li>• Automatic content handover</li> <li>• Widescreen (16:9) support</li> </ul>
<b>Cisco TelePresence ConferenceMe</b>	<ul style="list-style-type: none"> <li>• Video, audio, and content sharing <ul style="list-style-type: none"> <li>◦ Multiple layouts</li> <li>◦ Firewall friendly</li> </ul> </li> <li>• Independent transcode per participant</li> <li>• Up to 12 simultaneous connections</li> </ul>
<b>High-definition performance</b>	<ul style="list-style-type: none"> <li>• Up to 1080p 30 fps and 720p 60 fps H.264 4-Mbps continuous presence</li> <li>• Comprehensive HD audio</li> <li>• Dual video H.239</li> </ul>
<b>Language</b>	<ul style="list-style-type: none"> <li>• English as standard, with option to load alternative language packs onto the system</li> </ul>

**Table 4.** Video and Audio Specifications

<b>Bandwidth</b>	<ul style="list-style-type: none"> <li>• Up to 4 Mbps with both H.263 and H.264, for each site in all conference modes, including advanced continuous presence</li> </ul>
<b>Video standards</b>	<ul style="list-style-type: none"> <li>• H.261, H.263, H.263+, H.263++, and H.264</li> </ul>
<b>Video resolution</b>	<ul style="list-style-type: none"> <li>• From QCIF up to 1080p (1920 x 1080), including interlaced iCIF and iSIF</li> <li>• 4:3 and 16:9 aspect ratios</li> </ul>
<b>Frame rates</b>	<ul style="list-style-type: none"> <li>• Up to 60 frames per second</li> </ul>
<b>Audio standards</b>	<ul style="list-style-type: none"> <li>• G.711, G.722, G.722.1, G.723.1, G.728, G.729, MPEG-4 AAC-LC, MPEG-4 AAC-LD, and Polycom Siren14/G.722.1 Annex C</li> </ul>

<b>Audio features</b>	<ul style="list-style-type: none"> <li>• Wideband audio mixing</li> <li>• Built-in and uploadable auto attendant voice prompts</li> <li>• Automatic gain control, adjustable gain, power indication, and individual audio mute using webpages</li> </ul>
-----------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

**Table 5.** Network, Security, and Management Specifications

<b>Protocols</b>	<ul style="list-style-type: none"> <li>• H.323, SIP, H.235 (Advanced Encryption Standard [AES]), Secure Real-Time Transport Protocol (SRTP), Transport Layer Security (TLS), H.239 (dual video), VNC, Binary Floor Control Protocol (BFCP), H.243 (chair control), FTP, Real-Time Transport Protocol (RTP), (Real-Time Streaming Protocol (RTSP), HTTP, Secure HTTP (HTTPS), Dynamic Host Configuration Protocol (DHCP), Simple Network Management Protocol (SNMP), Network Time Protocol (NTP), NT LAN Manager (NTLM) (authentication), IPv4, and IPv6</li> </ul>
<b>Quality of service (QoS)</b>	<ul style="list-style-type: none"> <li>• Configurable differentiated services code point (DSCP) or type of service (ToS)/IP Precedence</li> </ul>
<b>Security features</b>	<ul style="list-style-type: none"> <li>• Seven levels of access rights and privileges for users</li> <li>• Strong password policy</li> <li>• Personal identification number (PIN)-protected conferences</li> <li>• Conference locking</li> <li>• Secure non-PC hardware and operating system</li> <li>• AES encryption, 128-bit key, H.235</li> <li>• SIP encryption</li> <li>• TLS certificate verification</li> <li>• Video firewall option—second Ethernet port</li> <li>• Audit log</li> </ul>
<b>Interfaces</b>	<ul style="list-style-type: none"> <li>• RJ-45 Ethernet, 10-/100-/1000-Mbps full/half duplex, manual or autosensing</li> <li>• RJ-45 serial port</li> <li>• CompactFlash socket</li> <li>• Thirty-nine status LEDs</li> </ul>
<b>System management</b>	<ul style="list-style-type: none"> <li>• XML management application programming interface (API)</li> <li>• Management through embedded web server</li> <li>• RS-232 for local control and diagnostics</li> <li>• Syslog for diagnostics</li> <li>• Configurable event logs and full H.323 and SIP decoding</li> <li>• Configuration backup to network</li> <li>• Secure upgrades through Ethernet or CompactFlash</li> <li>• Call detail records (CDRs)</li> <li>• SNMP</li> </ul>
<b>Network resilience</b>	<ul style="list-style-type: none"> <li>• Cisco TelePresence PacketSafe technology, which provides intelligent down-speeding, packet pacing, and packet-loss concealment to ensure optimum video and audio quality</li> <li>• Dynamic jitter buffering</li> <li>• Alternate gatekeepers</li> </ul>

**Table 6.** Physical Specifications

<b>Physical dimensions (H x W x D)</b>	<ul style="list-style-type: none"> <li>• Physical dimensions: 3.43 x 17.4 x 19.25 in. (87 x 442 x 489 mm) (2RU)</li> <li>• 19-in. rack-mountable (kit supplied) or standalone</li> </ul>
<b>Weight</b>	<ul style="list-style-type: none"> <li>• 24 lb (11 kg)</li> </ul>
<b>Power</b>	<ul style="list-style-type: none"> <li>• 100–240 VAC, 50/60 Hz</li> <li>• 600W maximum power consumption</li> </ul>
<b>Environmental data</b>	<ul style="list-style-type: none"> <li>• Operating temperature: (0 to 35°C) ambient</li> <li>• Relative humidity below 95% (noncondensing)</li> </ul>
<b>Approvals and compliance</b>	<ul style="list-style-type: none"> <li>• European safety: EN 60950-1</li> <li>• USA/Canada safety: UL 60950-1</li> <li>• CB, CE</li> <li>• EMC: EN55022 class A, EN61000-3-2, EN61000-3-3, EN55024: EN61000-4-2,-3,-4,-5,-6,-11, FCC Part 15 class A, VCCI class A, AS/NZS 3548, CCC: GB4943, GB9254, YD/T993</li> <li>• NAL Certificate (China)</li> <li>• RoHS compliant</li> </ul>

## Warranty Information

Find warranty information on Cisco.com at the [Product Warranties](#) page.

## Ordering Information

To place an order, visit the [Cisco Ordering Home Page](#) and refer to Table 7 or contact your local Cisco representative. To download software, visit the [Cisco Software Center](#).

**Table 7.** Ordering Information

Product Name	Part Number
Cisco TelePresence MCU 4501	CTI-4501-MCU-K9

## Cisco Services

Cisco and our partners provide a broad portfolio of intelligent, personalized services and support that can help you realize the full value of your Cisco TelePresence investment by increasing business agility and network availability. This portfolio of services accelerates business innovation through a network-based collaboration platform that enables businesses to collaborate anywhere, anytime. For more information about these services, please visit: <http://www.cisco.com/go/telepresenceservices>.

## For More Information

For more information about the Cisco TelePresence MCU 4501, please visit <http://www.cisco.com/go/telepresence> or contact your local Cisco account representative or authorized Cisco partner. Product specifications are estimates and subject to change without notice.



**Americas Headquarters**  
Cisco Systems, Inc.  
San Jose, CA

**Asia Pacific Headquarters**  
Cisco Systems (USA) Pte. Ltd.  
Singapore

**Europe Headquarters**  
Cisco Systems International BV Amsterdam,  
The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at [www.cisco.com/go/offices](http://www.cisco.com/go/offices).

Cisco and the Cisco Logo are trademarks of Cisco Systems, Inc. and/or its affiliates in the U.S. and other countries. A listing of Cisco's trademarks can be found at [www.cisco.com/go/trademarks](http://www.cisco.com/go/trademarks). Third party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1005R)